


## marlon **st** LONGLIFE

### STRUCTURED POLYCARBONATE SHEET

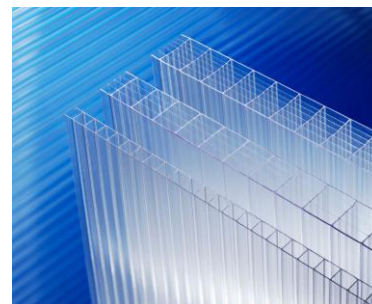

#### 16mm Triplewall

**MARLON ST** is the multiwall polycarbonate sheet manufactured by Brett Martin. The sheet is characterised by high optical clarity, light transmission, impact resistance and durability. It is available in a range of standard sizes, clear and tinted.

MARLON ST Longlife has a co-extruded UV protection layer on one side.

Colours:	Light Transmission:
	DIN 5036
Bronze (B)	18%
Clear (S)	77%
Opal (V)	42%

\*Non-standard colours are available subject to minimum order quantities.

Standard sheet sizes:	
Maximum Width	2100mm
Length	6 & 7 m (and as required)
Thickness	16mm

\*Non-standard colours are available subject to minimum order quantities.

Nominal Sheet Weight	2.7 kg/m <sup>2</sup>
U- Value	2.4 W/m <sup>2</sup> K

#### Service Temperature

MARLON ST can be installed in a diversity of applications, with varying temperatures. The material's mechanical performance is known to remain stable in prolonged service in temperatures ranging from -20 to +100 °C.

#### Installation

Applications of MARLON ST must make adequate allowance for thermal movement, nominally 3.5 mm per metre.

The minimum curve radius for 16 mm Triplewall sheet is 2800 mm.

#### Fire Performance

The fire performance of MARLON ST has been independently tested. For the most up to date certifications please contact the Technical department.



Brett Martin Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.

Brett Martin Ltd., 24 Roughfort Road, Mallusk, Co. Antrim, N. Ireland, BT36 4RB.  
Tel: +44 (0)28 9084 9999 Fax: +44 (0)28 9083 6666 E-mail: [technical@brettmartin.com](mailto:technical@brettmartin.com)